

HOLE HAMMER®

POSITIVE TURN REVERSE PNEUMATIC PIERCING TOOLS



EASIER TOOL MAINTENANCE. Tailbolt system provides easy access for tool maintenance, requiring a maximum of only 35 ft-lb (47.5 Nm) of torque.




EXTENDED TOOL BODY LIFE. Replaceable head design is heat-treated alloy to protect the tool body and can be replaced to extend the tool body life.




LONG-LASTING PERFORMANCE. Wear rings on piston and valve extend tool life and increase tool performance.



SUPERIOR RELIABILITY. Proven positive turn reverse design has minimal moving parts, delivering superior reliability and lower cost of ownership.

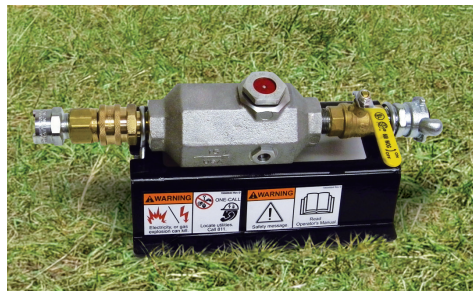

OPERATOR-FRIENDLY FEATURES. Oiler assemblies feature a Quick Reverse Swivel kit for air-on reversing, a sight glass to see oil levels and a pressure relief cap.



IMPROVED ACCURACY AND PRODUCTIVITY. The moving head option on the 2.5" (6.4 cm) and 3" (7.6 cm) piercing tools improve accuracy and productivity on high production jobsites.

MCLAUGHLINUNDERGROUND.COM

Vermeer®



Built by
McLAUGHLIN

HOLE HAMMER®

POSITIVE TURN REVERSE PNEUMATIC PIERCING TOOLS




HIGHER PRODUCTIVITY. LOWER OPERATING AND MAINTENANCE COSTS.

The Vermeer Hole Hammer® designed by McLaughlin handles a full range of projects. Contractors have counted on Vermeer for piercing tools from the very beginning of the trenchless age. Today, whether you specialize in gas and electric, fiber and telecom, or water and irrigation installations, Hole Hammer positive turn reverse piercing tools put the power of a proven, simple and reliable design in your hands — with legendary support and service from the industry's largest distribution network.



SPECIFICATIONS:

MODEL	DIAMETER	LENGTH	WEIGHT	AIR CONSUMPTION	AIR PRESSURE	REVERSE	BLOWS/MIN
VPT200	2" (5.1 cm)	45.3" (115.1 cm)	28 lb (12.7 kg)	22 cfm (623 L/min)	110 psi (7.6 bar)	8 turns	470
VPT250	2.6" (6.6 cm)	51.9" (131.8 cm)	58 lb (26.3 kg)	31 cfm (877.8 L/min)	110 psi (7.6 bar)	6 turns	385
VPT250S	2.6" (6.6 cm)	35.5" (90.2 cm)	34 lb (15.4 kg)	35 cfm (991.1 L/min)	110 psi (7.6 bar)	5 turns	720
VPT250RT	2.6" (6.6 cm)	51.9" (131.8 cm)	57 lb (25.9 kg)	31 cfm (877.8 L/min)	110 psi (7.6 bar)	6 turns	385
VPT300	3" (7.6 cm)	56.1" (142.5 cm)	76 lb (34.5 kg)	32 cfm (906.1 L/min)	110 psi (7.6 bar)	5 turns	370
VPT300RT	3" (7.6 cm)	56.1" (142.5 cm)	74 lb (33.6 kg)	32 cfm (906.1 L/min)	110 psi (7.6 bar)	5 turns	370
VPT400	3.9" (9.9 cm)	64" (162.6 cm)	136 lb (61.7 kg)	68 cfm (1925.5 L/min)	110 psi (7.6 bar)	7 turns	370
VPT500	5.25" (13.3 cm)	65.9" (167.4 cm)	214 lb (97.1 kg)	98 cfm (2775.1 L/min)	110 psi (7.6 bar)	7 turns	333

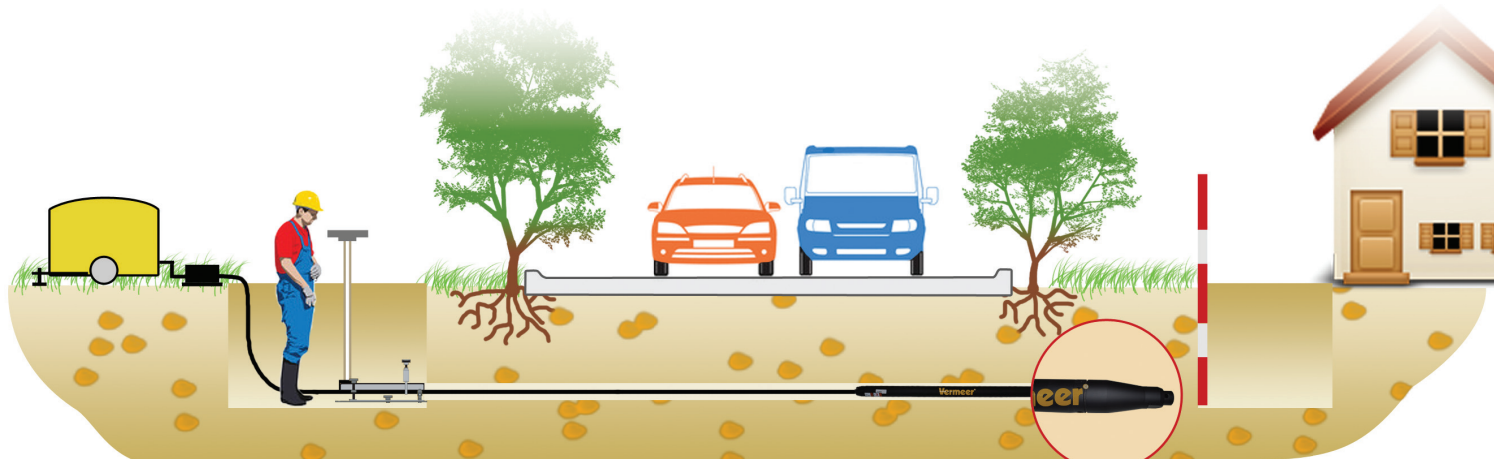

Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information about machine specifications. Vermeer Corporation reserves the right to make changes in engineering, design, and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Vermeer, the Vermeer logo and Equipped to Do More are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. © 2015 Vermeer Corporation. All Rights Reserved. McLaughlin, the McLaughlin logo and Hole Hammer are trademarks of McLaughlin Group, Inc. © 2015 McLaughlin Group, Inc. All Rights Reserved.

mclaughlinunderground.com | 864-277-5870



EQUIPPED TO DO MORE.

PN 296338983